


## NOSING OPTIONS AND STAIR TYPES

### NOSING WITH INSERT

Mitered nosing with brass, silver, black, white, ivory or brown insert for mitre protection. Available in all colours and ranges.

Dimensions: 90 x 30 x 1800mm

The brass, silver, black or white ivory or brown insert nosings come in slightly longer lengths than 1800mm, but only 1800mm is usable due to the length of the inserts. These nosings are designed to be cut to size on site.


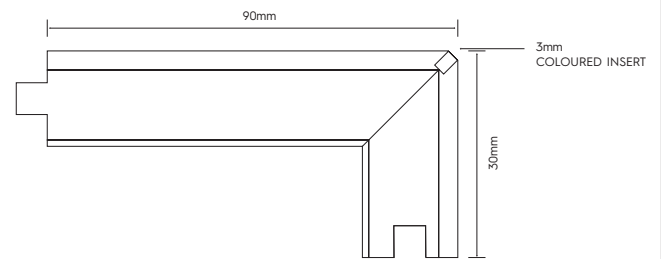


### NOSING WITH INSERT AND RETURN

Mitered nosing with brass, silver, black, white, ivory or brown insert for mitre protection. Available in all colours and ranges.

Dimensions: 90 x 30 x 1800mm / Return to be same thickness as the specified board

The brass, silver, black, white, ivory or brown insert nosings come in slightly longer lengths than 1800mm, but only 1800mm is usable due to the length of the inserts. These nosings are designed to be cut to size on site.

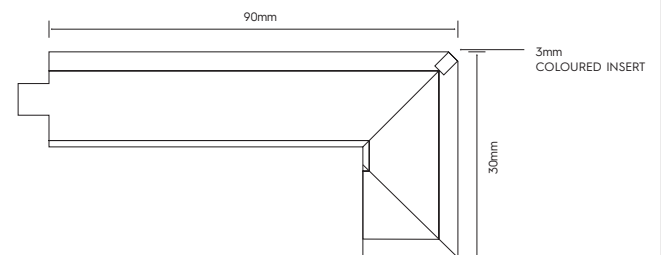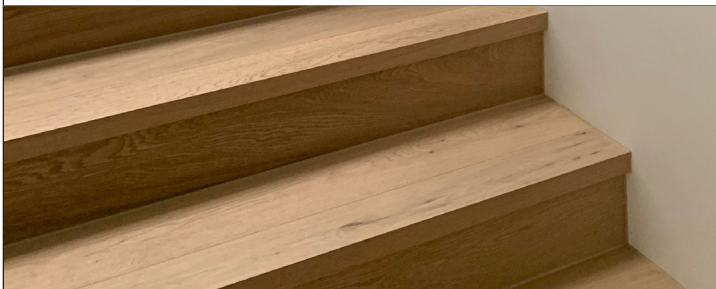


### PREMIUM NOSING

Machined nosing with pencil rounded finish. Available in all Premium Range colours only. **Please note, variation in colour, grain structure and finish is to be expected between the nosing pieces and timber flooring supplied.**

Dimensions: 90 x 30 x 2200mm

Available Lengths 2200mm. All timber nosings whether they are engineered, mitred or solid and prone to chipping over time. Maintenance is expected.


Premium Nosings are warranted, however the warranty does not cover chipping on the edges. It is recommended that an insert nosing (brass, silver, black, white, ivory or brown) is selected to protect the edge of the nosing.

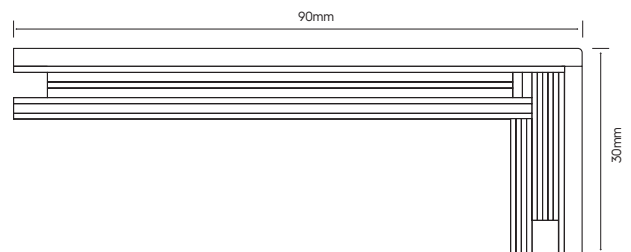

## NOSING OPTIONS AND STAIR TYPES



### WATERFALL TREAD, RISER & NOSING

Used to create a waterfall effect to one side of the stairs. 15mm return on the exposed side of stairs. Waterfall boards are manufactured off-site and may incur a tolerance of up to 1mm per board. Please note that the waterfall (side) edge only has a return on the vertical face and therefore is designed to be flush with the side of a staircase and does not overhang.

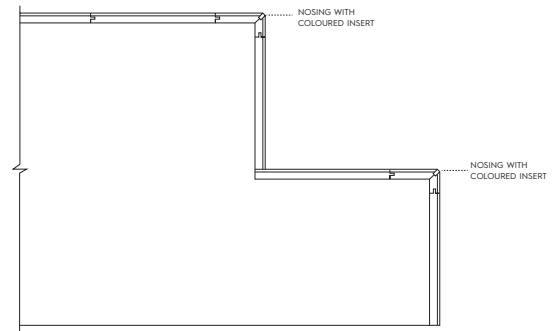



### PREMIUM TREAD (64-80MM)

Fully supported treads that can be screwed onto staircase stringers & plates. Structural LVL or KDHW core wrapped with Woodcut on all sides. Max width 300mm. Max length 1200mm. 77mm total thickness as standard however can be varied to 64-80mm total thickness as required.

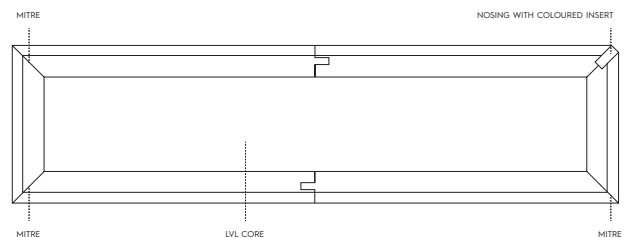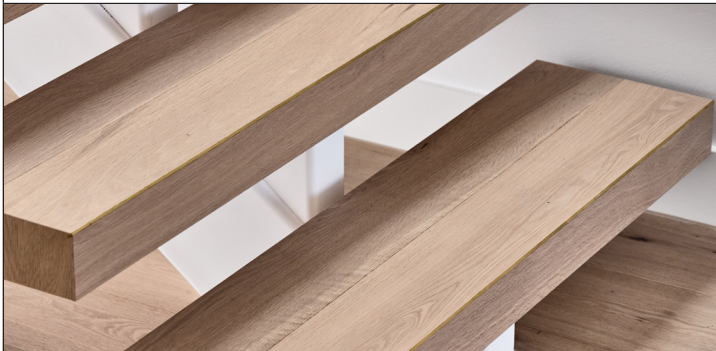

### TIMBER SLEEVE (FLOATING TREAD)

Used when there is a cantilevered beam coming out of the wall or when there is an existing structural tread that needs to be cladded between two stringers.

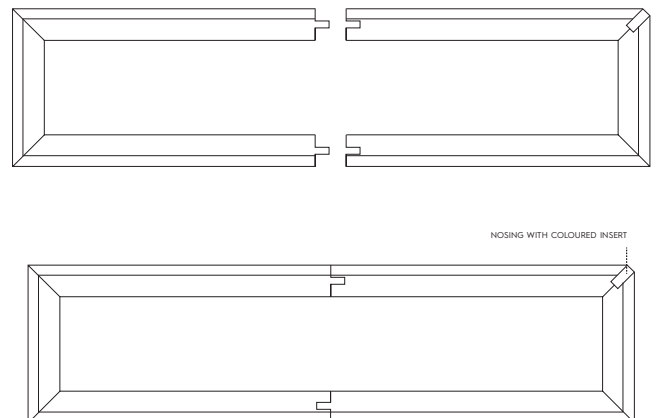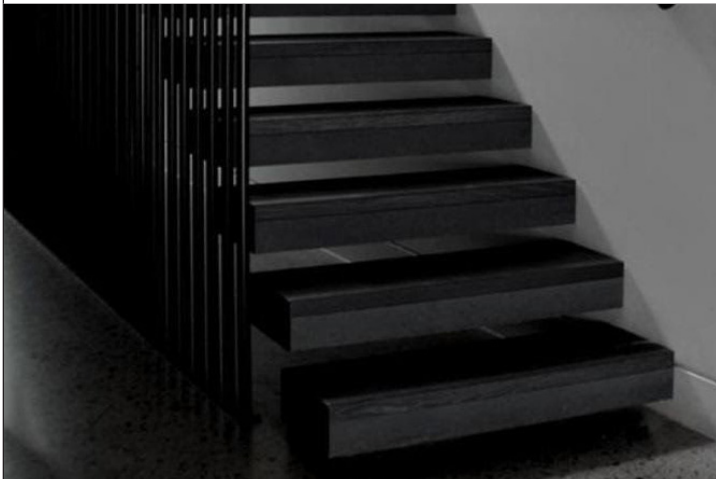

## NOSING OPTIONS AND STAIR TYPES

### NOSING COLOUR OPTIONS

Brass, Brushed Brass, Silver, Black, White, Ivory and Brown inserts are all available.

					
Brass	Silver	Black	White	Ivory	Brown